

# FX100 Audio Analyzer

## Technical Specifications

Analog Generator	
<b>Number of channels</b>	2 or 4 ( <i>optional</i> ); channel independent signal level, frequency control
<b>Connectors</b> Types Configurations	XLR   BNC   Binding post (ground) Balanced   unbalanced   unbalanced grounded   common signal test
<b>Test signals</b>	Sinusoidal StepSweep (2 to 500 points; frequency   level   time sweep) GlideSweep (0.1 s to 40 s) White noise (cf = 3.646), Pink noise (cf = 3.846) IMD (acc. IEC60268/3)
<b>Level</b> Range Balanced Unbalanced Accuracy <sup>1)</sup> Balanced, unbalanced GND, CMST Unbalanced (if grounded externally) Flatness 10 Hz to 20 kHz 10 Hz to 80 kHz Setting resolution -40 dBV to +24.9 dBV < -40 dBV	-100 dBV to +21.9 dBV (10 $\mu$ V to 12.45 V) for 600 $\Omega$ load @ 24 dBu -100 dBV to +15.9 dBV (10 $\mu$ V to 6.22 V)  < $\pm 0.04$ dB @ 1 kHz, output load > 2 k $\Omega$ < +0.02 / -0.06 dB @ 1 kHz, output load > 2 k $\Omega$  $\pm 0.01$ dB @ (-80 dBV to +21.9 dBV) $\pm 0.08$ dB @ (-80 dBV to +21.9 dBV)  $\pm 0.01$ dB $\pm 0.05$ dB
<b>Frequency</b> Range Resolution Accuracy <sup>2)</sup>	5 Hz to 80 kHz < 2 ppm $\pm 25$ ppm (standard version)   $\pm 2.5$ ppm (with AES option installed)
<b>Residual THD+N</b> <sup>1)</sup> 1 kHz, 0 dBV Fundamental 20 Hz to 20 kHz Fundamental 10 Hz to 80 kHz	$\leq -104$ dB typical $\leq (-101$ dB + 0.8 $\mu$ V) @ 22 kHz BW <sup>3)</sup> $\leq (-92$ dB + 1.6 $\mu$ V) @ 80 kHz BW <sup>3)</sup>
<b>IMD MOD</b> Low frequency tone range $f_1$ High frequency tone range $f_2$ Amplitude ratio Residual IMD MOD d2+d3 1:1 amplitude ratio 4:1 amplitude ratio 10:1 amplitude ratio	60 Hz to 1 kHz 2 kHz to 20 kHz, $f_2 \geq 6.1 * f_1$ 1:1, 4:1 and 10:1 typ. -101 dB @ 0 dBV, $f_1 = 60$ Hz, $f_2 = 20$ kHz, amplitude ratio 1:1 $\leq -95$ dB <sup>3), 4)</sup> @ output level > -20 dBV $\leq -90$ dB <sup>3), 4)</sup> @ output level > -20 dBV $\leq -85$ dB <sup>3), 4)</sup> @ output level > -20 dBV
<b>IMD DFD</b> Mean frequency range $f_m$ Difference frequency range $f_d$ Residual IMD DFD d2+d3	2.5 kHz to 20 kHz 80 Hz to 2 kHz typ. -108 dB @ 0 dBV, $f_m = 80$ Hz, $f_d = 20$ kHz $\leq -100$ dB <sup>3), 4)</sup> @ output level > -20 dBV
<b>IMD DIM</b> Square frequency Sine frequency Amplitude ratio Residual IMD DIM	3.15 kHz (DIM 30 or DIM 100) 15 kHz 4:1, square to sine peak-peak typ. -103 dB @ 0 dBV $\leq -95$ dB <sup>3), 4)</sup> @ output level > -20 dBV

<sup>1)</sup> For loads < 2 k $\Omega$ , the FX100 generator inward resistance (approx. 1.8  $\Omega$ ) degrades the output level accuracy.

<sup>2)</sup> Temperature range +20 to +45  $^{\circ}$ C;  $\pm 1$  ppm ageing p.a.

<sup>3)</sup> System specification includes contribution from both generator and analyzer; generator only and analyzer only contributions are typically less.

<sup>4)</sup> Applies for all FX100 units with serial number  $\geq 11221$ ; for instruments with a lower serial number, +5 dB have to be added.



<b>Measurement functions</b>	<p>Frequency [Hz ; ppmr]  Level [V ; dBV ; dBu ; dB SPL ; dBPa ; dBr ; W]  Selective level [V ; dBV ; dBu ; dB SPL ; dBPa ; dBr ; W]  Input level [V ; dBV ; dBu ; dB SPL ; dBPa ; dBr ; W]  THD+N [% ; dB ; dBV ; dBu ; dB SPL ; dBPa ; dBr ; W]  THD [% ; dB ; dBV ; dBu ; dB SPL ; dBPa ; dBr ; W]  Harmonic distortion k2 to k35 [% ; dB ; dBV ; dBu ; dB SPL ; dBPa ; dBr ; W]  IMD (acc. IEC60268/3) [% ; dB]  FFT [V ; dBV ; dBu ; dB SPL ; dBPa ; dBr ; W]  Gain [% ; dB]  Inter-channel phase [Deg ; Rad]  XTalk [% ; dB]  Signal latency [s]  PureSound™ steepness [Pa/s ; V/s] (optional)  DCV differential [V]  DCV common high (XLR pin 2-1); low (XLR pin 3-1) [V]  DCR [Ω]  Impedance [Ω] (requires SIP, SIL or SIH option)</p>
<b>Sweep modes</b>	<p>StepSweep: Frequency ; Amplitude ; Time ; Table sweep  GlideSweep: Frequency sweep</p>
<b>Level measurement</b>	<p>Range &lt; 1 μV to 200 Vp  Resolution ±0.01 dB  Accuracy ±0.04 dB @ 1 kHz  Flatness (AC coupling OFF) <sup>8)</sup>  20 Hz to 20 kHz <sup>9)</sup> ±0.015 dB  10 Hz to 80 kHz <sup>9)</sup> ±0.1 dB  Generator + analyzer 20 Hz to 20 kHz ±0.025 dB  Generator + analyzer 10 Hz to 80 kHz ±0.2 dB  Additional tolerance with AC coupling ON  -0.01 dB @ 20 Hz typical ; -0.065 dB @ 10 Hz ; -0.3 dB @ 5 Hz  Residual noise  A-weighted ≤ 1.2 μV (-118.4 dBV)  20 kHz BW ≤ 1.6 μV (-116.0 dBV)  80 kHz BW ≤ 3 μV (-110.5 dBV) ; 2.5 μV (-112 dBV) typical</p>
<b>Frequency measurement</b>	<p>Range 5 Hz to 80 kHz  Resolution &lt; 0.1 ppm  Accuracy  5 Hz to 10 Hz ≤ ±25 ppm (standard) ; ±2.5 ppm (with AES board) absolute + measurement error ±50 ppm  10 Hz to 80 kHz ≤ ±25 ppm (standard) ; ±2.5 ppm (with AES board) absolute + measurement error ±1 ppm</p>
<b>THD ; THD+N ; harmonics measurement</b>	<p>Range 0 % to 100 %  Accuracy ≤ ±0.5 dB (10 Hz to 80 kHz)  THD fundamental measurement range  Source internal generator 5 Hz to 80 kHz  Source external generator 10 Hz to 80 kHz  Minimum input level for fundamental frequency detection ≤ 0.1 mV  Analyzer residual THD / harmonics (22 kHz BW)  Fundamental 0 dBV @ 1 kHz ≤ -107 dB typical  Fundamental 20 Hz to 20 kHz <sup>10)</sup> ≤ (-104 dB + 0.5 μV)  Generator + analyzer residual THD+N <sup>11)</sup> ≤ (-104 dB + 1.7 μV) @ 1 kHz, 0 dBV, 22 kHz BW typical  Fundamental 20 Hz to 20 kHz ≤ (-101 dB + 1.7 μV) @ 22 kHz BW  Fundamental 10 Hz to 80 kHz ≤ (-92 dB + 3.4 μV) @ 80 kHz BW  Fundamental 5 Hz to 10 Hz ≤ (-90 dB + 3.4 μV) @ 80 kHz BW (source internal generator)</p>
<b>IMD MOD</b>	<p>Low frequency acceptance range <math>f_1</math> 60 Hz to 1 kHz  High frequency acceptance range <math>f_2</math> 2 kHz to 20 kHz, <math>f_2 \geq 6.1 * f_1</math>  MOD component analysis d2, d3, d2+d3, or d2 ... d5  Residual IMD MOD d2+d3 typ. -101 dB @ 0 dBV, <math>f_1 = 60</math> Hz, <math>f_2 = 20</math> kHz, amplitude ratio 1:1  1:1 amplitude ratio ≤ -95 dB <sup>3), 4)</sup> @ output level &gt; -20 dBV  4:1 amplitude ratio ≤ -90 dB <sup>3), 4)</sup> @ output level &gt; -20 dBV  10:1 amplitude ratio ≤ -85 dB <sup>3), 4)</sup> @ output level &gt; -20 dBV</p>

<sup>8)</sup> Specified for Meter and StepSweep. For GlideSweep, the length must be ≥ 0.2 s and ±0.01 dB ripple has to be added.

<sup>9)</sup> Specified by design and characterization; not production tested.

<b>IMD DFD</b> Mean frequency acceptance range $f_m$ Difference frequency acceptance range $f_d$ DFD component analysis Residual IMD DFD d2+d3	2.5 kHz to 20 kHz 80 Hz to 2 kHz d2, d3, d2+d3, or d2 ... d5 typ. -108 dB @ 0 dBV, $f_m = 80$ Hz, $f_d = 20$ kHz $\leq -100$ dB <sup>3), 4)</sup> @ output level > -20 dBV
<b>IMD DIM</b> Square frequency Sine frequency DIM component analysis Residual IMD DIM	3.15 kHz (DIM 30 or DIM 100) 15 kHz u1 ... u9 or u4+u5 typ. -103 dB @ 0 dBV $\leq -95$ dB <sup>3), 4)</sup> @ output level > -20 dBV
<b>Interchannel phase measurement</b> Range Accuracy <sup>12)</sup> 10 Hz to 20 kHz 20 kHz to 80 kHz	-180° to 180°  $\leq \pm 1^\circ$ $\leq \pm 3^\circ$
<b>XTalk measurement</b> Frequency range Residual XTalk <sup>13)</sup> 10 Hz to 20 kHz 20 kHz to 80 kHz	10 Hz to 80 kHz  < (-125 dB + 1 $\mu$ V) < (-105 dB + 1 $\mu$ V)
<b>Signal latency measurement</b> Range GlideSweep sync source internal GlideSweep sync source external Residual signal latency Resolution Accuracy <sup>14)</sup> DUT bandwidth $\geq 100$ Hz to 20 kHz DUT bandwidth $\geq 100$ Hz to 15 kHz DUT bandwidth $\geq 300$ Hz to 8 kHz DUT bandwidth $\geq 300$ Hz to 3.4 kHz Speaker measurements <sup>15)</sup> Max. allowed interchannel latency difference	0 s to 95 ms 0 s to 19 s $\leq 0.05$ ms 0.005 ms  $\leq 0.05$ ms $\leq 0.1$ ms $\leq 0.2$ ms $\leq 0.5$ ms $\leq 0.1$ ms $\leq 40$ ms
<b>Filters</b> LowPass (real time; only one filter can be active at a time)  HighPass (real time; only one filter can be active at a time)  Weighting (real time; only one filter can be active at a time)	3.4 kHz, 12 <sup>th</sup> order (passband ripple $\pm 0.01$ dB, -3 dB point 3.484 kHz, stopband attenuation > 97 dB @ 4.08 kHz) 8 kHz, 12 <sup>th</sup> order (passband ripple $\pm 0.01$ dB, -3 dB point 8.196 kHz, stopband attenuation > 97 dB @ 9.6 kHz) 15 kHz, 12 <sup>th</sup> order (passband ripple $\pm 0.01$ dB, -3 dB point 15.364 kHz, stopband attenuation > 99 dB @ 18 kHz) 20 kHz Brickwall, compliant to AES17 (10 Hz to 20 kHz passband ripple $\pm 0.1$ dB, stopband attenuation > 60 dB @ 24 kHz) 22.4 kHz, 4-pole, compliant to DIN45405 40 kHz, 12 <sup>th</sup> order (passband ripple $\pm 0.01$ dB, -3 dB point 40.86 kHz, stopband attenuation > 100 dB @ 48 kHz)  10 Hz, 3 <sup>rd</sup> order Butterworth (-3 dB point 10 Hz, stopband attenuation > 60 dB @ 1 Hz) 22.4 Hz, 4 <sup>th</sup> order, compliant to DIN 45405 100 Hz, 4 <sup>th</sup> order Butterworth (-3 dB point 100 Hz, stopband attenuation > 80 dB @ 10 Hz) 300 Hz, 4 <sup>th</sup> order Butterworth (-3 dB point 300 Hz, stopband attenuation > 90 dB @ 20 Hz) 400 Hz, 4 <sup>th</sup> order Butterworth (-3 dB point 400 Hz, stopband attenuation > 100 dB @ 20 Hz)  A-weighting, compliant to IEC 179 ; ANSI S1.4 ; IEC 61672-1 C-message weighting, compliant to ANSI/IEEE 743-1995 ; BSTM 41004
<b>Input coupling</b>	DC ; AC (-3 dB point < 3 Hz)
<b>FFT</b> Analysis Transform length Sampling rate Windows Averaging (only in frequency domain) Waveform display modes	Fully channel-independent and independent of other simultaneous measurements 512 ; 1024 ; 2048 ; ... 1048576 ; 2097152 samples 192 kHz 4-term Blackman-Harris ; Hann (Hanning) ; none Exponential ; arithmetical Frequency domain ; time domain

<sup>10)</sup> Input level has to be  $\leq 19.5$  dBV

<sup>11)</sup> System specification includes contribution from both generator and analyzer; generator only and analyzer only contributions are typically less.

<sup>12)</sup> Both analyzer inputs must have the same coupling (AC ; DC), and the automatic input range is switched OFF.

<sup>13)</sup> System specification includes contribution from both generator and analyzer; one generator channel muted.

<sup>14)</sup> Accuracy can degrade due to impulse response band limitation; Brickwall filter assumed for the specified accuracy; listed cutoff frequency @ -3 dB point

<sup>15)</sup> With sample rate adjustment turned OFF

<b>DCV measurement</b> Differential (XLR pin 2-3) Input range setting Accuracy Common (XLR pin 2-1/3-1) Range Accuracy	460 mV to 200 V ≤ ±0.6 % of input range setting 200 V (fixed) ≤ ±50 mV
<b>DCR measurement</b> Range Accuracy 4 Ω to 30 Ω 30 Ω to 100 kΩ	4 Ω to 5 kΩ ; 5 kΩ to 100 kΩ (manual Bias selection) < 4 % < 0.8 %
<b>Interfaces</b>	
<b>Communication</b> USB host USB device LAN	2*USB mass-storage device (rear and front), A-plug, protocol version 2.0 Remote control USB-TMC, B-plug, protocol version 2.0 (for future use)
<b>Monitor output</b> Connector Signals Maximum output power	6.3 mm (¼") Jack after the input filter stage ; after the PureSound™ bandpass 65 mW @ 32 Ω, software-controlled volume -80 dB to +40 dB
<b>Auxiliary I/O</b> Configuration Output $V_{OHmin}$ (@ $I_{OH} = +3$ mA) $V_{OLmax}$ (@ $I_{OL} = -3$ mA) Impedance Input Level range $V_{IH}$ $V_{IL}$ Impedance Min. input pulse width Max. protection against external Voltage	8 programmable general purpose digital inputs & outputs 3.3 V <sub>TTL</sub> 2.4 V 0.4 V 50 Ω typical 5 V <sub>TTL</sub> max. -0.5 to +5.5 V 2.0 V 0.8 V 10 kΩ ≥ 200 μs 42.4 Vp (according to IEC61011)
<b>General data</b>	
<b>Power supply</b>	100 ; 120 ; 230 VAC 50 ; 60 Hz
<b>Temperature range</b> Operating conditions Storage	+5° to +45°C (+41° to +113°F) -20° to +80°C (-20° to +176°F)
<b>Humidity</b>	≤ 90% R.H. (non condensing)
<b>Mechanical dimensions</b>	width 215 mm (8.5" i.e. half-rack) height 132 mm (5.25" i.e. 3 RU) length 429 mm (16.9")
<b>Weight</b> (2-channel base unit w/o options)	5.12 kg (11.3 lbs)

**FX-SIP Option**

<b>Output</b> Bandwidth Power (BW 22 kHz) <sup>16)</sup> Dual operation Bridged operation	5 Hz to 80 kHz ( $\pm 0.1$ dB relative to 1 kHz without load)  2*10 W into 2 $\Omega$ / 4 $\Omega$ or 2*5 W into 8 $\Omega$ THD < -80 dB / 0.01% 1*30 W into 2 $\Omega$ / 4 $\Omega$ or 1*20 W into 8 $\Omega$ THD < -86 dB / 0.005%
<b>Amplifier gain</b>	0 dB
<b>Output level</b> Overall Accuracy <sup>17)</sup> Added error due to amplifier inward resistance Dual Mode (R <sub>i</sub> = 50 m $\Omega$ ) Bridge Mode (R <sub>i</sub> = 80 m $\Omega$ ) Flatness <sup>17)</sup> 10 Hz to 20 kHz, load $\geq 2 \Omega$ 10 Hz to 80 kHz, load $\geq 8 \Omega$ 10 Hz to 80 kHz, load $\geq 2 \Omega$	$\pm 0.1$ dB (no load) $Loss = dB (R_{Load} / (R_{Load} + R_i))$ +0 / -0.21 dB @ 2 $\Omega$ load ; +0 / -0.11 dB @ 4 $\Omega$ load ; +0 / -0.05 dB @ 8 $\Omega$ load +0 / -0.34 dB @ 2 $\Omega$ load ; +0 / -0.17 dB @ 4 $\Omega$ load ; +0 / -0.09 dB @ 8 $\Omega$ load  $\pm 0.06$ dB +0.1 / -0.2 dB +0.1 / -0.4 dB
<b>Inward resistance R<sub>i</sub></b> Dual mode (per channel) Bridge mode	$\leq 50$ m $\Omega$ (20 m $\Omega$ typical) $\leq 80$ m $\Omega$ (40 m $\Omega$ typical)
<b>Damping factor</b> Dual mode Bridge mode	$> 80$ @ 10 Hz to 10 kHz, load $\geq 4 \Omega$ $> 50$ @ 10 Hz to 10 kHz, load $\geq 4 \Omega$
<b>THD</b> <sup>18)</sup> Dual mode (BW 22 kHz) fundamental 1 kHz fundamental 10 Hz to 20 kHz Bridge mode (BW 22 kHz) fundamental 1 kHz fundamental 10 Hz to 20 kHz	$-101$ dB typical (with 1 W @ 4 $\Omega$ ) $\leq -80$ dB + 15 $\mu$ V (power 0 to 10 W, load 2 to 250 $\Omega$ )  $-105$ dB typical (with 5 W @ 4 $\Omega$ ) $\leq -86$ dB + 15 $\mu$ V (power 0 to 30 W, load 2 to 250 $\Omega$ )
<b>S/N ratio</b> A-weighted BW 22.4 kHz BW 80 kHz	$> 109$ dB below rated power @ 4 / 8 $\Omega$ $> 106$ dB below rated power @ 4 / 8 $\Omega$ $> 103$ dB below rated power @ 4 / 8 $\Omega$
<b>XTalk</b>	$< -60$ dB, BW 10 Hz to 20 kHz
<b>Slew rate</b>	$> 50$ V/ $\mu$ s
<b>Interchannel phase accuracy</b> <sup>12) 110)</sup>	$\pm 1.3$ deg
<b>Amplifier protection</b>	Short circuit ; overcurrent shutdown and automatic retry ; thermal
<b>Maximum output</b> Level Dual mode Bridge mode Current	16.2 dBV 21.9 dBV 4.2 A (Bridge mode, 2 $\Omega$ load)
<b>Impedance measurement</b> <sup>20)</sup> Nominal speaker impedance range Measurement range Nominal shunt resistance Measurement accuracy <sup>20) 21)</sup> General accuracy Meter, StepSweep 5 Hz to 1 kHz, GlideSweep 20 Hz to 1 kHz Meter, StepSweep 5 Hz to 10 kHz, GlideSweep 20 Hz to 10 kHz Bridge mode 4-wire (sense pins used) Bridge mode 2-wire, Dual mode Additional impedance measurement error with GlideSweep < 20 Hz, 10 Hz to 10 kHz	2 $\Omega$ to 250 $\Omega$ 0 $\Omega$ to $> 1$ k $\Omega$ 0.2 $\Omega$ / 0.1 % (in front of amplifier feedback $\Rightarrow$ no impact on FX-SIP output level)  $\pm 5$ % with Z = 2 $\Omega$ to 150 $\Omega$ <sup>22)</sup> ; $\pm 7$ % with Z = 150 $\Omega$ to 250 $\Omega$ <sup>22)</sup> $\pm 10$ % with Z = 2 $\Omega$ to 150 $\Omega$ <sup>22)</sup> ; $\pm 15$ % with Z = 150 $\Omega$ to 250 $\Omega$ <sup>22)</sup>  $\pm 2$ % with Z = 2 $\Omega$ to 16 $\Omega$ <sup>22)</sup> $\pm 5$ % with Z = 2 $\Omega$ to 64 $\Omega$ <sup>22)</sup> $+1$ %

<sup>16)</sup> Duty cycle (signal ON : OFF) must not exceed 1:2

<sup>17)</sup> Including FX100 generator output level tolerance

<sup>18)</sup> The generator Chn1 and Chn2 frequencies have to be the same

<sup>110)</sup> Tolerances contain all FX100 errors including generator output phase and analyzer input phase

<sup>20)</sup> Tolerances include all errors of FX100 generator output level, analyzer input level and FX-SIP shunt & inward resistance


<sup>21)</sup> Frequency range: Meter, StepSweep 5 Hz to 10 kHz ; GlideSweep 20 Hz to 10 kHz

<sup>22)</sup> AC coupling OFF

<b>DCR measurement</b>	
Current source (DCR 250 Ω range)	24.925 mA / ±1 %
Range	
Dual mode	0 Ω to 500 Ω
Bridge mode	0 Ω to 1 k Ω
Accuracy resistance DCR (auto range active)	
R = 2 Ω to 4 Ω	±2.5 %
R = 4 Ω to 250 Ω	±1.2 %

### FX-SIL Option

<b>Nominal shunt resistance</b>	1 Ω ±0.1 %
<b>Recommended current range</b>	50 μA to 1 A
<b>Overcurrent detection</b>	1.4 A ±10 %
<b>Speaker power range</b>	
Minimum power	<< 1 mW
Maximum power @ 2 Ω	2 W
Maximum power @ 4 Ω	4 W
Maximum power @ 8 Ω	8 W
Maximum power @ 32 Ω	32 W
Maximum power @ 250 Ω	32 W
<b>Impedance measurement</b>	
Nominal speaker impedance range	2 to 250 Ω
Accuracy @ AC coupling OFF <sup>23), 24)</sup>	
5 Hz to 20 kHz	≤ ±1 %
Accuracy @ AC coupling ON <sup>23), 24)</sup>	
20 Hz to 20 kHz	≤ ±1 %
10 Hz to 20 kHz	≤ ±3 %
5 Hz to 20 kHz	≤ ±5 %
<b>DCR measurement</b>	
DC current source (DCR 250 Ω range)	5 mA ±1 %
Range	2 to 250 Ω
Accuracy	
R = 2 to 8 Ω	≤ ±2.5 %
R = 8 to 250 Ω	≤ ±1 %

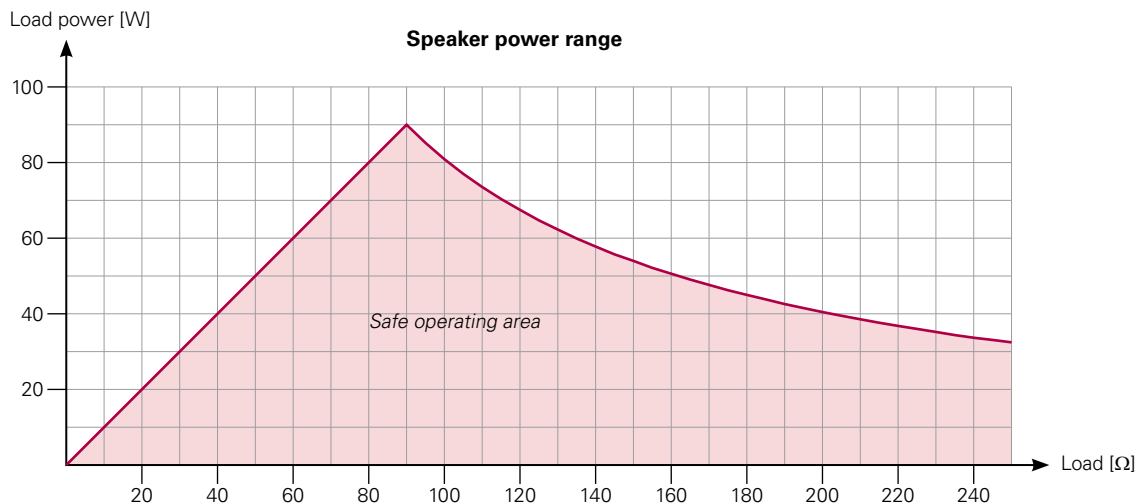


<sup>23)</sup> Cabling from amplifier to SIL, SIH in accordance to IEC 60268-12

<sup>24)</sup> Add 1% to tolerance if loudspeaker impedance is measured with 2 channels (i.e. reference @ amplifier terminal + shunt measurement)

### FX-SIH Option


<b>Nominal shunt resistance</b>	0.1 $\Omega$ $\pm$ 0.1 %
<b>Recommended current range</b>	25 mA to 10 A
<b>Overcurrent detection</b>	12 A $\pm$ 10 %
<b>Speaker power range</b> Minimum power Maximum power @ 2 $\Omega$ Maximum power @ 4 $\Omega$ Maximum power @ 8 $\Omega$ Maximum power @ 16 $\Omega$ Maximum power @ 32 $\Omega$	< 1 W 200 W 400 W 800 W 1300 W 670 W
<b>Impedance measurement</b> Nominal speaker impedance range Accuracy @ AC coupling OFF <sup>23), 24)</sup> 5 Hz to 20 kHz Accuracy @ AC coupling ON <sup>23), 24)</sup> 20 Hz to 20 kHz 10 Hz to 20 kHz 5 Hz to 20 kHz	2 to 32 $\Omega$  $\leq \pm 1$ %  $\leq \pm 1$ % $\leq \pm 3$ % $\leq \pm 5$ %
<b>DCR measurement</b> DC current source (DCE 100 $\Omega$ range) Range Accuracy @ R = 2 to 100 $\Omega$	100 mA $\pm$ 1 % 2 $\Omega$ to 100 $\Omega$ $\leq \pm 2$ %

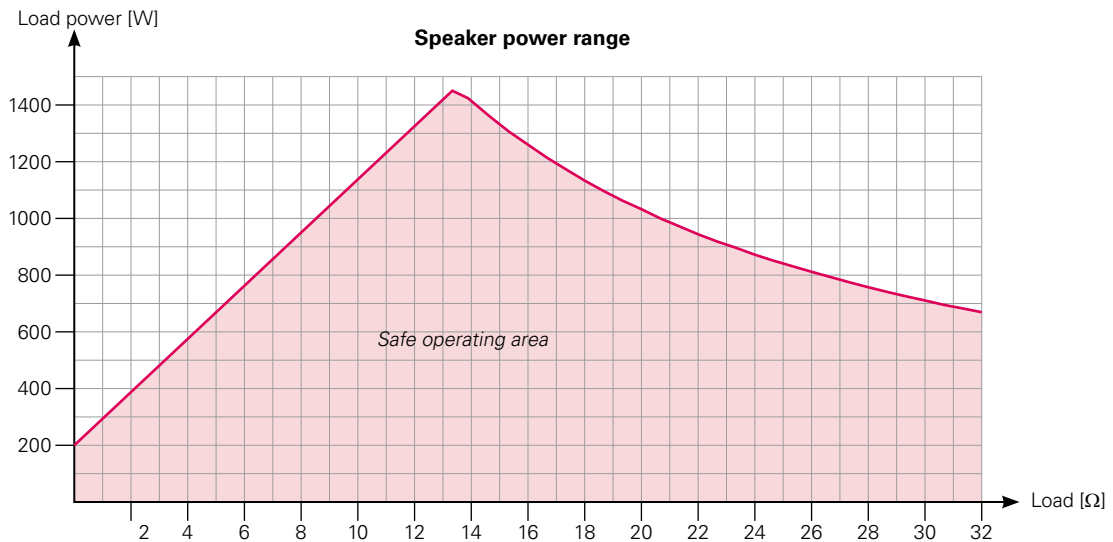



**FX-DF Option** <sup>25)</sup>

<b>Operation range</b>	D-class amplifier testing of up to 2 kW @ 8 Ω
<b>Maximum input voltage</b>	±200 Vp, 140 Vrms
<b>Level measurement</b> Accuracy Flatness 20 Hz to 20 kHz	±0.06 dB @ 1 kHz ±0.1 dB
<b>High-frequency rejection</b>	> 70 dB @ 300 kHz
<b>Residual DFD acc. to IEC60268</b> <sup>26)</sup> Input Level ≤ 60 Vpp Input Level ≤ 100 Vpp	< -100 dB < -96 dB
<b>Residual THD @ input level 60 Vpp</b> Typical Maximum	< -105 dB < -100 dB @ fundamental input frequency 20 Hz to 10 kHz
<b>Residual crosstalk</b>	< -100 dB
<b>Residual noise</b> <sup>27)</sup>	≤ 10 μV (-100 dBV), BW 20 kHz

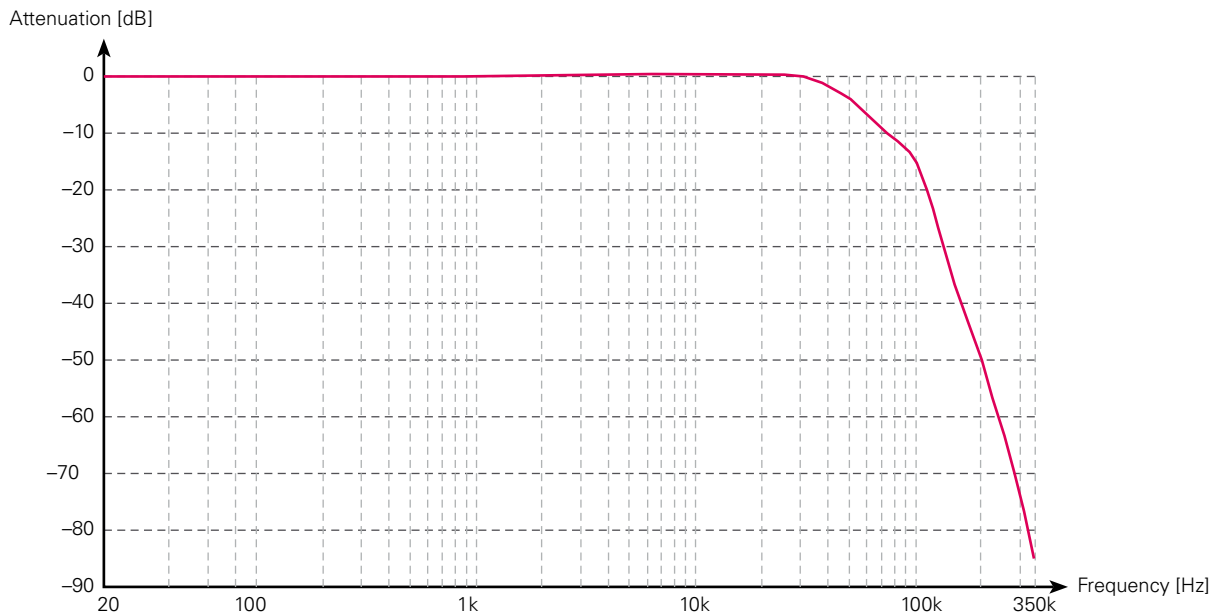

<sup>25)</sup> FX-DF specifications include FX100 Analyzer & Generator specifications whenever applicable

<sup>26)</sup> Test Frequencies 18 kHz + 20 kHz, DFD products 2<sup>nd</sup> order (@ 2 kHz) / 3<sup>rd</sup> order (@ 16 and 22 kHz)

<sup>27)</sup> FX-SIP power supply disconnected

## FX-AES Option

Digital Signal Generator	
<b>Interface</b>	
Balanced	
Format	AES-EBU per AES3-2003
Connector	XLR
Carrier amplitude	2.2 Vpp ±10 % into 110 Ω
Output impedance	110 Ω
Unbalanced	
Format	S/PDIF-EIAJ per IEC60958-3 or AES3-id
Connector	BNC (S/PDIF with BNC to RCA adapter)
Carrier amplitude	0.5 Vpp (S/PDIF)   1.0 Vpp (AES3-id) ±20 % into 75 Ω
Output impedance	75 Ω
Optical <sup>28)</sup>	Toslink®, fs ≤ 192 kHz
<b>Output sample rate</b>	
Source selection	internal   digital input signal recovered   sync input
Range	22 to 220 kHz
Resolution	≤ ±0.0001 % (±1 ppm)
Accuracy <sup>29)</sup>	≤ ±0.00025 % (±2.5 ppm) using internal reference
<b>Audio data word length</b>	16   18   20   24 bit (TPDF Dither added for < 24 bit)
<b>Channel status bit setting</b>	Consumer format: channel independent selection, full implementation per IEC60958 (english language decoded) Professional format: channel independant selection of bit #0 to #21, bit #32 to #39 per IEC 60958 (english language decoded)
<b>User bits</b>	set to 0
<b>Validity bit</b>	channel independent toggling between Valid – Invalid
<b>Signals</b>	<i>same as analog output</i>
<b>Level</b>	
Range	-142 dBFS to 0 dBFS (0.0707 μFFS to 1 FFS, channel independent)
Resolution	±0.001 dB
Flatness	±0.006 dB
Anti-Aliasing cut-off <sup>30)</sup>	
-0.01 dB point	0.453 ±0.5 % * fs, typical 21.75 kHz with fs = 48 kHz
-3 dB point	0.478 ±0.5 % * fs, typical 22.98 kHz with fs = 48 kHz
Attenuation ≥ 120 dB	0.55 * fs, typical 26.2 kHz with fs = 48 kHz
<b>Frequency range</b>	5 Hz to 80 kHz
<b>Residual</b>	
Noise	≤ -128 dBFS (20 kHz BW)
Jitter <sup>31)</sup>	≤ 2 ns peak (700 Hz to 100 kHz jitter BW)
<b>Digital Signal Analyzer</b>	
<b>Interface</b>	
Balanced	
Format	AES-EBU per AES3-2003
Connector	XLR
Unbalanced	
Format	S/PDIF-EIAJ per IEC60958-3 or AES3-id, symmetrical input
Connector	BNC (S/PDIF with RCA to BNC adapter)
Input impedance Bal/Unbal	110 Ω   75 Ω   Hi-Z (> 2k Ω)
Carrier signal range	200 mVpp to 10 Vpp (covers AES3-2003   S/PDIF IEC 60958-3   AES3-id)
Optical <sup>27)</sup>	Toslink®, fs ≤ 192 kHz
<b>AES recovered input carrier sample rate</b>	22 to 220 kHz
<b>Measurement</b>	
Range	22 to 220 kHz
Resolution	≤ ±0.00005 % (±0.5 ppm)
Accuracy <sup>29)</sup>	≤ 0.00025 % (±2.5 ppm) internal reference accuracy ±0.00015 % (±1.5 ppm) frequency measurement accuracy
<b>Detection range of standard sample rate</b>	±5000 ppm
(32   44.1   48   64   88.1   96   128   176.4   192 kHz)	

<sup>28)</sup> Sampling rate fs ≤ 192 kHz for AES option installed after July 2014; otherwise fs ≤ 110 kHz

<sup>29)</sup> Specification valid for temperature range +20° to +45°C, excluding the aging (±1 ppm/year)

<sup>30)</sup> Specification valid for fs = 26 to 220 kHz

<sup>31)</sup> Specification valid for fs = 32 to 220 kHz, output source internal or SyncIn

<b>Embedded data display</b>	24 bit activity indicators of each channel
<b>Channel status bit indicators</b>	Consumer format: channel independent selection, full implementation per IEC60958 (english language decoded) Professional format: channel independant selection of bit #0 to #21, bit #32 to #39 per IEC 60958 (english language decoded) Warning highlight mode if channel status differs from received data stream (e.g. audio word length, audio data mode, sample rate etc.)
<b>User bits</b>	not displayed
<b>Validity flag</b>	displayed for each channel
<b>Carrier condition indicator</b>	parity   coding error   receiver synchronized
<b>Level</b> Range Resolution Flatness Anti-Aliasing cut-off <sup>27)</sup> -0.01 dB point -3 dB point Attenuation ≥ 120 dB	-144 to 0 dBFS ±0.001 dB ±0.007 dB 0.453 ±0.5 % * fs, typical 21.75 kHz with fs = 48 kHz 0.478 ±0.5 % * fs, typical 22.98 kHz with fs = 48 kHz 0.55 * fs, typical 26.2 kHz with fs = 48 kHz
<b>Frequency range</b> Meter, StepSweep GlideSweep	5 Hz to 0.4986 * fs 5 Hz to 0.465 * fs
<b>Residual noise</b>	< -135 dBFS, BW 20 kHz
<b>Measurements</b>	<i>same as in analog input mode, except of PureSound   DCV common   DCR Impedance</i>
<b>Sync Input Characteristics</b>	
<b>Interface</b> Format Connector Input impedance Frequency range Input amplifier range Rise / fall time	Squarewave or Video (PAL   NTSC) BNC 75 Ω   Hi-Z (> 1 k Ω) 22 to 220 kHz, 15.625 kHz (PAL)   15.734 kHz (NTSC) 200 mVpp to 5 Vpp < 500 ns
<b>Sample rate measurement</b> Range Resolution Accuracy <sup>27)</sup>	22 to 220 kHz, 15.625 kHz (PAL)   15.734 kHz (NTSC) ≤ ±0000.5 % (±0.5 ppm) ≤ 0.00025 % (±2.5 ppm) internal reference accuracy ±0.00015 % (±1.5 ppm) frequency measurement accuracy
<b>Detection range of standard sample rate</b> Video (15.625 kHz PAL   15.734 kHz NTSC) Audio (32   44.1   48   64   88.1   96   128   176.4   192 kHz)	±1500 ppm ±5000 ppm
<b>Residual jitter<sup>29)</sup></b>	≤ 2 ns peak (700 Hz to 100 kHz jitter BW)
<b>PLL loop filter</b>	5 kHz