


## CQ-18T

### Overview

The CQ-18T is an ultra-compact digital audio mixer designed to be operated locally using its touchscreen and physical controls, remotely using its built-in WiFi or through connection to a wired or wireless network.

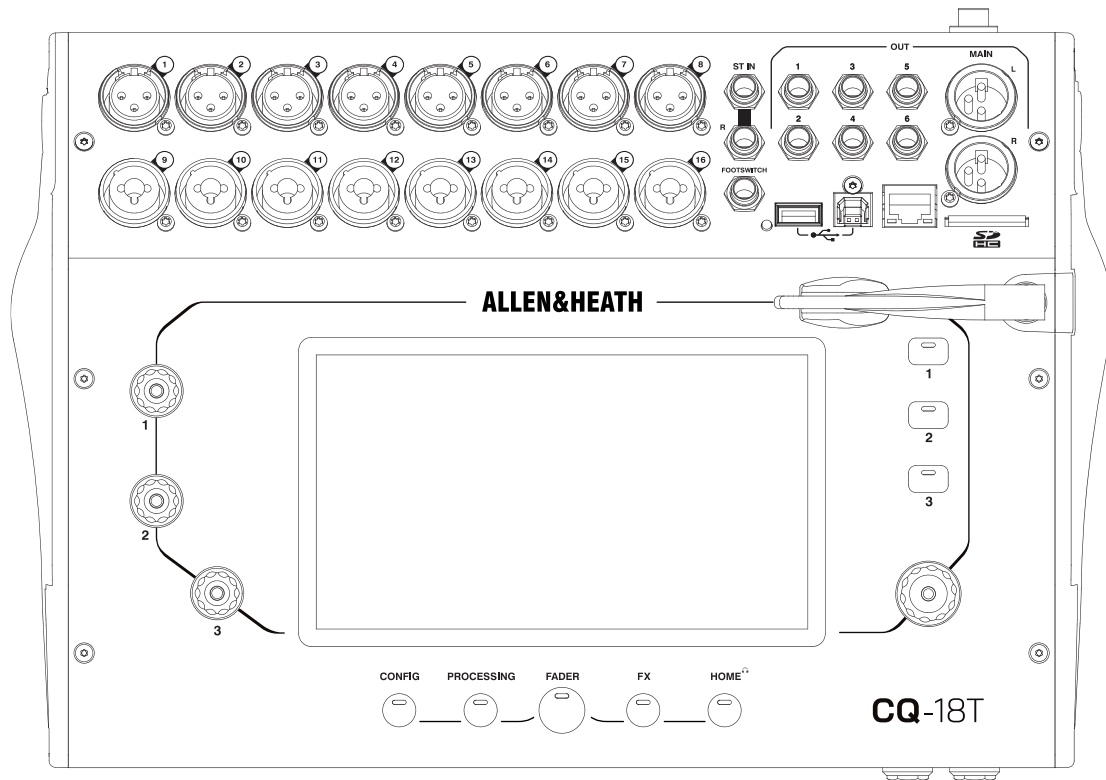

- 19x Inputs to Mix (16x Mono/Linkable, 3x Stereo)
- Stereo MainLR Output
- 6x Aux Outputs (Linkable up to 3x Stereo)
- 8x XLR Mic/Line Input Sockets
- 8x XLR/Jack 'Combi' Mic/Line Input Sockets
- Stereo Line Input (2x TRS)
- 2x XLR Output Sockets (MainLR)
- 6x TRS Output Sockets
- 2x Stereo Headphone Outputs
- Dedicated Stereo USB Input to Mix
- Dedicated Stereo Bluetooth Input to Mix
- 96kHz Input/Output Processing
- 4x FX Assist Engines
- Built-In Dual Band WiFi (CQ as Host)
- RJ45 Network Socket (CQ as Client)
- USB-A For Stereo Audio Record/Playback and Data
- USB-B For Multichannel Audio Record/Playback (24x22)
- SD Card Slot for Multichannel Audio Record/Playback (24x22)
- 7" Capacitive Touchscreen with 5x Screen Keys and Associated Rotary Encoder
- 3x Configurable SoftRotaries
- 3x Configurable SoftKeys
- Configurable Single/Dual Footswitch Connection
- Rack Mountable (Optional Kit Available)
- 12V DC Power Inlet with switch, External Worldwide PSU supplied
- Control Via Free Apps – Windows/MacOS/iOS/Android
- Width - 346mm/13.6"
- Depth - 242mm/9.5"
- Height - 89mm/3.5"
- Weight – 3kg/6.6lb