

# CN-3600 SE

## Contractor Series SmartSequencers




Furman's CN-3600 SE SmartSequencer™ combines protected AC power distribution and filtration with sequential system power on/off in a 1RU, 220-240VAC, rack-mount unit.

### Features

- SmartSequencing technology allows large and complex Pro A/V systems to be safely powered on and off with a simple press of a button or turn of a key.
- Multiple units may be daisy chained at runs of over 300 meters with bi-directional communications between units for sequencing on and off large and/or complex systems.
- RS-232 compatibility provides command set integration with control systems. An optional RS-232-to-Ethernet adaptor for control, programming, & monitoring from any Web-enabled device via Telnet, direct HTTP connection, or Panamax/Furman's BlueBOLT® platform.
- Series Multi-Stage Protection (SMP) ensures zero downtime for mission-critical installations by safely absorbing, clamping and dissipating transient surges and spikes without damage to internal circuitry or connected equipment.
- Extreme Voltage Shutdown (EVS) safeguards from catastrophic under-voltage (under 175V sustained) or over-voltage (over 275V sustained) conditions. Unit can be set to automatic or manual recovery after an EVS condition has subsided.
- Linear Filtering Technology (LiFT) ensures maximum performance from connected equipment by reducing AC noise evenly across the audio & video bandwidth.
- Security covers and sequence on/off key switch prevent unauthorized personnel from tampering with DIP switches or running/shutting down equipment.
- Fire alarm shut off.
- 16 Amp total capacity.
- 15 Year Limited Product Warranty. See warranty policy documentation for terms and conditions.




### Front Panel

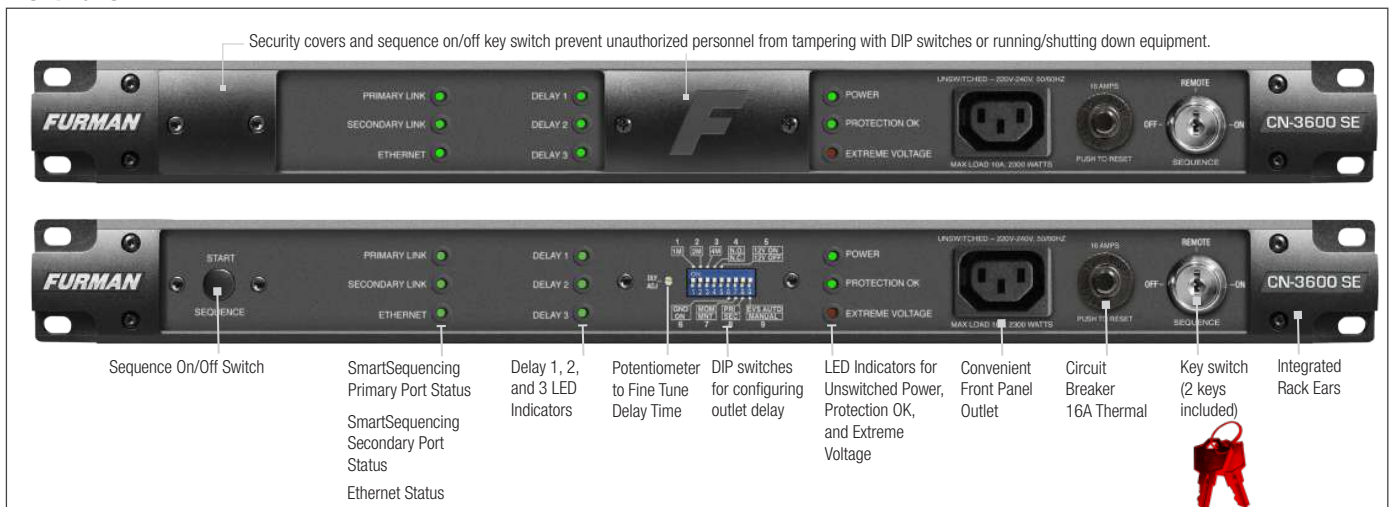

# CN-3600 SE Contractor Series SmartSequencers

## Rear Panel

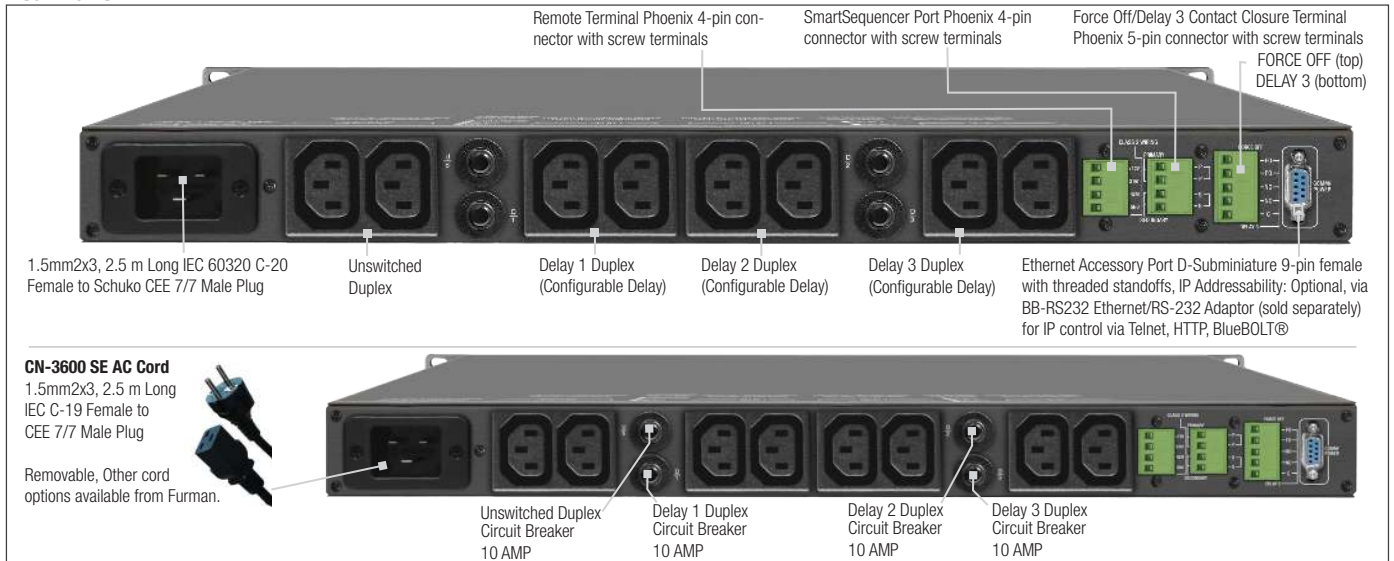

## Specifications

### AC Voltage Input Range

180-270 VAC, 50/60Hz

### Maximum AC Current Rating

16 Amps (Thermal breaker)

### AC Cord:

1.5mm2x3, 2.5m Long, black, IEC C-19 Female to Schuko CEE 7/7 Male Plug

### AC Receptacles:

Convenience Outlet (Front Panel) 1 IEC C-13 (Unswitched)  
Rear Panel Outlets: 1 IEC C 13 pair (Unswitched), 3 IEC C13 pairs (Sequenced, each pair is controlled by separate relay)

### Surge/Under-Overvoltage Protection:

AC Surge Protection: Series Multi-Stage Protection (SMP)  
Spike Protection Mode: Line to neutral, zero ground leakage  
Spike Clamping Voltage: 375 V peak @ 6,000 volts/3,000 amps  
Response Time: 1 nanosecond  
Maximum Surge Current: 6,500 Amps  
AC Undervoltage Protection: 175VAC+/-5VAC  
AC Overvoltage Protection: EVS, 275VAC+/-5VAC  
AC Overvoltage Reset Modes: Manual and Auto-reset (configurable)

### AC Filtering:

LiFT  
Noise Attenuation: Linear, 10dB @10KHz, 40dB@100KHz, 50dB@500KHz

### Operating Temperature Range:

5C (40F) to 40C (105F) degrees

Specifications subject to change due to product upgrades and improvements.

### Humidity Range:

<90% rH (Relative Humidity)

### User Interface:

Key switch: Front panel, 3-position key switch (On, Off, Remote)  
Keys: Included, 1 pair  
Pushbutton Switch: Front panel, hidden by security cover  
Circuit Breaker: Front panel, pushbutton, 16A Thermal Breaker  
Front panel diagnostic indicators: Primary link, Secondary link, Ethernet, Remote off, Delay 1, Delay 2, Delay 3, Power, Protection OK, Extreme Voltage  
Front Panel DIP Switches: Hidden by security cover, 1 Minute Delay, 2 Minute Delay, 4 Minute Delay, Force Off NO/NC, 12V Mode On/Off GND Mode On, Momentary/Maintained, Primary/Secondary, EVS Reset Auto/Manual  
Potentiometer: Front panel, hidden by security cover, fine tune delay adjust

### Control/Status/Triggering (Rear Panel):

Remote Terminal: +5-30VDC In, 12VDC (10mA) Out  
SmartSequencing: Phoenix-type 4-Pin Connector with Screw Terminals, Primary & Secondary Links (Current Loop - 300 m nominal)  
Remote Terminal: Phoenix-type 4-Pin Connector with Screw Terminals; +12V, STAT, REM, GND  
Force Off/Delay 3 Terminal: Phoenix-type 5-Pin Connector with Screw Terminals, FORCE OFF, DELAY 3  
RS-232 Compatible: Yes, DE-9 Connector  
IP Accessibility: Optional, via BB-RS232 Ethernet/RS-232 Adaptor (sold separately) for direct IP control via Telnet, HTTP, BlueBOLT®

Voltmeter: Available data via RS-232 or Ethernet option, +/- 2VAC accuracy

Ammeter: Available data via RS-232 or Ethernet option, +/-1A accuracy


Power Consumption (No Load): 10 Watts

Safety Agency Mark: CE

RoHS Compliant: Yes



## Dimensions and Weight

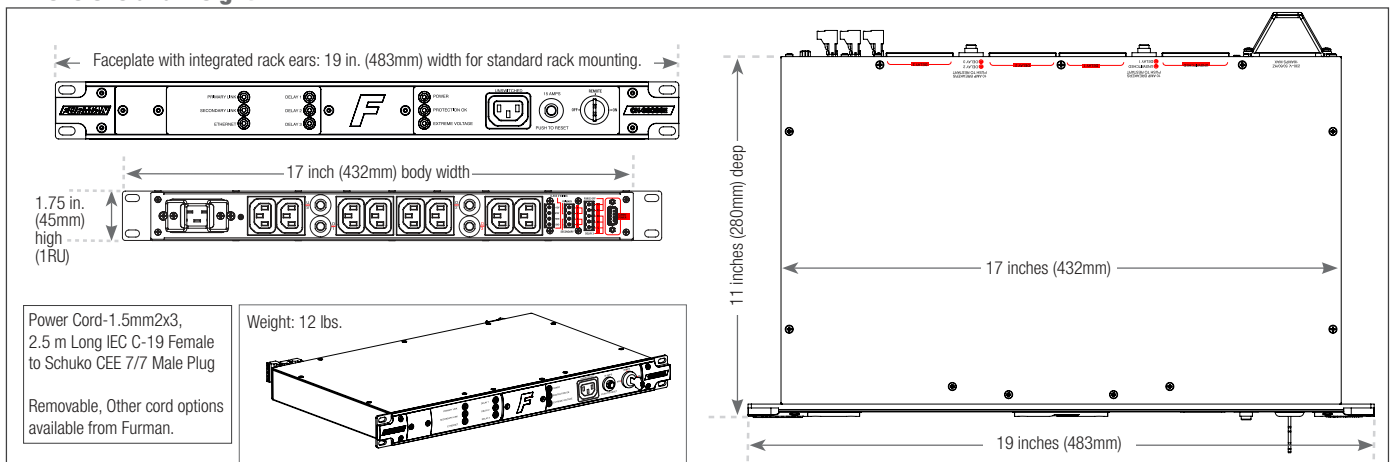

www.furmancontractor.com 800-472-5555

**FURMAN**