



AX10

SpotMax™

Data sheet







Optical

- Colours
RGBAW
- Total LED power
135W
- Luminous Flux
3350Lm
- Emittance (@2m)
10350Lx
- CRI
92
- Strobe
0-25Hz
- Beam Angle
13°
- Pixels
1

Construction



- Housing
Aluminium
- IP Rating
IP65
- Relative humidity
0-100%
- Operating Temperature
0-40 °C
32-104 °F
- Weight
7.98kg
17.5Lbs
- Dimensions
279 x 296 x 253 (mm)
10.9 x 11.6 x 9.9 (inches)

Accessories

-  Powercon True1 cord
AX10-CHR (Included)
-  32° Flood diffusor
AX10-DDSK (Included)
-  13°x 46° Wallwash diffusor
AX10-WWDSK (Included)
-  13°x 46° Rotatable diffusor
AX10-ROTAD
-  Charging case
AX10-CHRCSE
-  Super bolt
AX10-BLT

Electrical

- Battery
LG Chem Lithium-ion
- Battery Lifetime
70% after 300 cycles
- LED Lifetime
50.000 Hours
- Charging time (nominal)
7 Hours
- Input Voltage
90-264V 47-63Hz
- Input Current
1.8A/115VAC ~ 1.0A/230VAC
- Inrush Current
Cold start 70A/230VAC

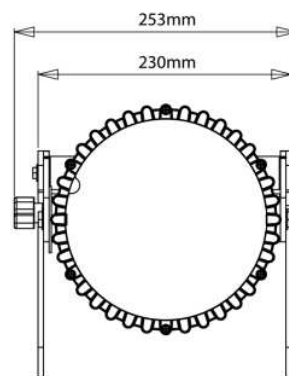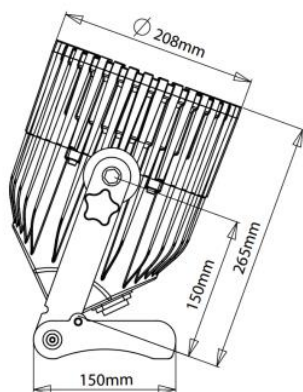

Control

- Wireless Modules
865-870MHz
902-928MHz
2.4GHz
- Range
300m | 330 Yards
- DMX
Supports CRMX and W-DMX

